


	6030-DR-075	Input
		100-240VAC 2,0 A
		Output
		24VDC 3 A 75 VA
		Dimensions (AxBxC) A = 5,6 cm / 2,2" B = 12,5 cm / 4,9" C = 11 cm / 0,4"

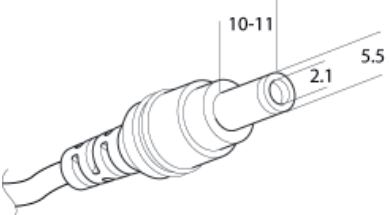
	6030-DR-120	Input
		100-120VAC/200-240VAC 3,3 A / 2,0 A
		Output
		24VDC 5 A 120 VA
		Dimensions (AxBxC) A = 6,6 cm / 2,6" B = 12,5 cm / 4,9" C = 11 cm / 0,4"

	6030-DR-240	Input
		100-240VAC 3,5 A
		Output
		24VDC 10 A 240 VA
		Dimensions (AxBxC) A = 12,6 cm / 5" B = 12,5 cm / 4,9" C = 11 cm / 0,4"

	6030-DR-480	Input
		200-240VAC 4,0 A
		Output
		24VDC 20 A 480 VA
		Dimensions (AxBxC) A = 22,7 cm / 8,9" B = 12,5 cm / 4,9" C = 11 cm / 0,4"

Rail Type	P *)	Max. cable length per diameter / wire gauge					
		0.75 mm ² / 20		1 mm ² / 18		1.5 mm ² / 14	
6200	45W	22 m	72 ft	30 m	98 ft	45 m	148 ft
6300	20W	56 m	184 ft	75 m	246 ft	112 m	367 ft

*) medium weight curtain, 'room' height, glider 4010, no heading

<p>6034-24V-C1 1x Connector for 24V DC power plug</p> <ul style="list-style-type: none"> - Coaxial power plug - 'Center positive' - Min. 22V - Max. 28V - 2,1 x 5,5 x 10-11 mm - (0,8"x2,2"x0,39"-0,43") - Cable length 122 cm (48") 
--

